



IC230M

Intercom 200 series power supply unit.

- 2 separate audio channels for transmission.
- Channel linking feature to talk on both channels (A+B).
- Supporting up to 30 IC200B belt pack units.
- Front panel connection to link an IC200B belt-pack as a master unit.
- Built-in line and load regulation and short-circuit protection.
- Output voltage: DC 28V - 1.1A max.
- Connections: 3-pins XLR Neutrik
- Standard rack: 19" single rack unit.
- Dimensions (WxHxD): 483x44x190 mm.
- Weight: 2.8 kg.

IC200B

Portable belt-pack unit for IC230M (or compatible) Intercom systems.


- Visual and audible indication of a call.
- Wide dynamic preamplified range microphone featuring automatic turn-off when headset/mic is unplugged.
- Earphone amplifier with Push-Pull technology.
- Microphone On/Off switch.
- Call button with a visual alert.
- Audio alert volume control.
- Earphone volume control.
- Anti-sidetone circuitry regulation.
- A rugged all-metal die-cast case with belt clip.
- Connections: 3-pins XLR Neutrik
- Dimensions (WxHxD): 90x42x126 mm.
- Weight: 340 g.



ICH01, ICH02

Professional single-ear headset with built-in dynamic microphone.

- Suitable for IC200 (or compatibles) intercom systems.
- Foam-filled ear cushion provides comfort in longer sessions and acoustic insulation in moderate-noise level environments.
- Flexible and robust microphone boom moulded from a single die.
- Headphones audio bandwidth: 40Hz - 14.4kHz
- Headphones rated impedance: 400 Ω
- Microphone polar pattern: cardioid
- Type: dynamic
- Microphone audio bandwidth: 40Hz - 15kHz
- Microphone impedance: 400 Ω
- Connection: 4 poles XLR Neutrik
- Weight: 210 g.

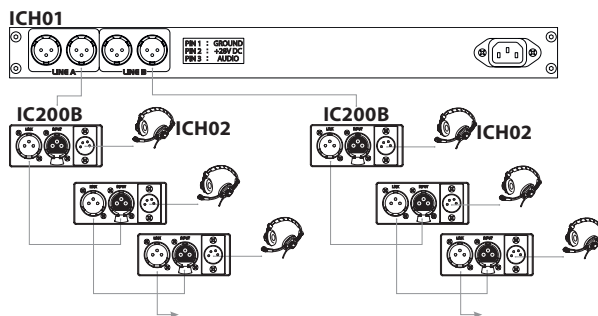

METAL STANDS



VERTIGO LINE STANDS 44



MICROPHONES STANDS 48



MIC ACCESSORIES 51



SPEAKERS STANDS 53



LIGHT STANDS 56



MUSIC STANDS 57