



ACCENT1Q


- Source: 1x10W RGBW LED
- Luminous flux: 279lm
- Beam angle: 10°
- Colour mixing: RGBW/FC
- Colour wheel: virtual colour wheel with presets
- Protocols: DMX512
- DMX channels: 4/6/10channel
- Power consumption (at 230V): 14,6W
- Signal connection: Seetronic XLR 5p IN/OUT connectors
- Power connection: moulded IP power IN connector
- IP rating: 30
- Dimensions (WxHxD): 110x67x172 mm
- Weight: 0.89kg



LUMIPARIRCH
(included)

TRUSSPOD3T

- Source: 3x3.5W RGB LEDs
- Luminous flux: 321lm
- Beam angle: 16°
- Colour mixing: RGB/FC
- Colour wheel: virtual colour wheel with presets
- Sound mode: music activation through internal microphone and sensitivity control
- Protocols: DMX512
- DMX channels: 3/8 channel
- IR: infrared sensor controlled by remote
- Power consumption (at 230V): 11.4W
- Output (at 230V): 97 units on a single power line
- Signal connection: XLR 3p IN/OUT connectors
- Power connection: IEC IN/OUT connectors
- IP rating: 30
- Dimensions (WxHxD): 121x104x108mm
- Weight: 0.65kg

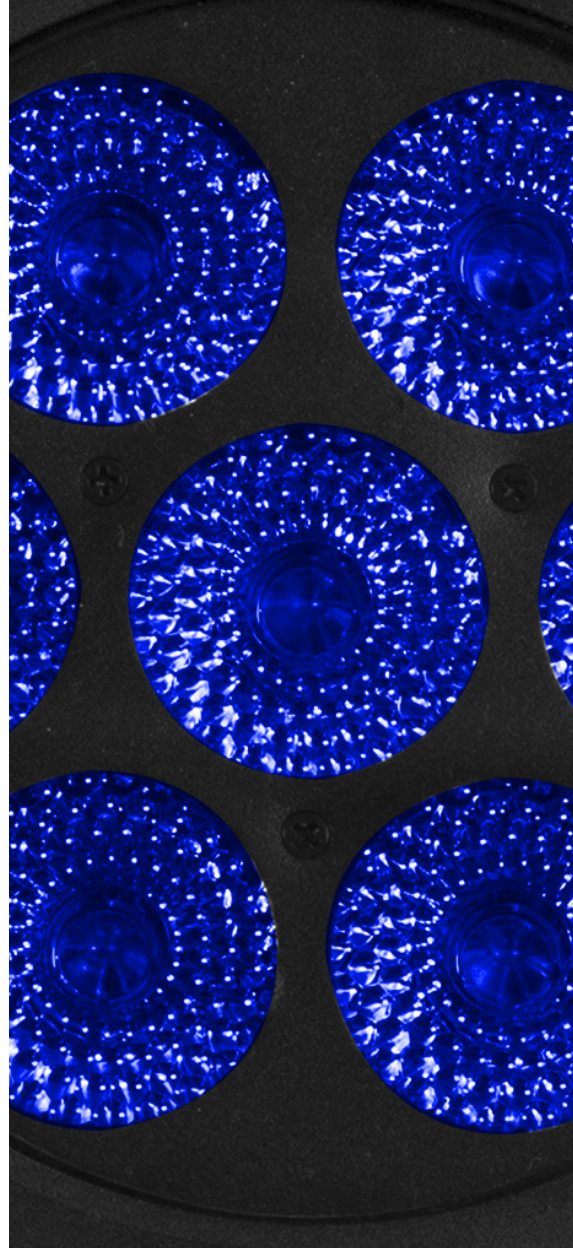

STATIC LIGHTS

BARS



LUMIPIX15IP

26



LUMIPIX12UQ

28



LUMIPIX12QTOUR

26



LUMIPIX12UT

329



LUMIPIX12UQPRO

27



LUMIPIX12TRIIP

29



LUMIPIX9UHEPRO

27



PIXROLL10UTRI

30



LUMIPIX9UHE

28