

## AS285



Black powder-coated steel bracket.

- Specifically designed for wall-mounting of LIVE8/LIVE8A speakers.
- Vertical and horizontal adjustment
- Inclination: 30° max
- Black finish
- Hardware for speaker mounting included

## AS282



Wall-mount ABS support for acoustic speakers.

- Compatible with the entire COMPACT series (Compact88T excluded).
- Swivel ball adjustable in any direction.
- Holes Distance: 60 mm.
- Maximum wall distance: 100 mm.
- Matte black finish.

## AS255



Wall-mount metal support for acoustic speakers

- Standard 35 mm pole.
- Junction with horizontal and vertical adjustment.
- Max tilt: 30°.
- Length: max 390 mm.
- Height: 250 mm.
- Load: max 60 kg
- Matte black finish.
- Weight: 2,9 kg.

## SP20

Aluminium speaker/subwoofer spacing pole, heavy duty and lightweight for an easy transportation.

- Assembled with rugged aluminium and high-quality components.
- Locking system with nylon knobs.
- Steel safety pin.
- Height adjustable: min 90 - max 140 cm.
- Standard 35/38 mm pole.
- Load capacity: 40 kg.
- Available in matte black (BK) finish.



## SM20

Steel spacing pole with M20 screw for loudspeaker / subwoofer, strong and light for easy transport.

- Assembled with rugged steel and high-quality components.
- Locking system with nylon knobs.
- Steel safety pin.
- Height adjustable: min 98.5 - max 133.5 cm.
- Standard 35/38 mm pole.
- Standard M20 mm screw.
- Load capacity: 60 kg.
- Weight: 1,2 Kg




## AS210



Extensible metal support for 2 speakers


- Standard 35 mm pole.
- Length: 80 cm.
- Extension: min 43 cm - max 71 cm.
- Load: max 40 kg.
- Matte black finish.
- Weight: 2,5 kg.



## LS30

Stand for spot projectors, air-cushioned system

- 1 adjustable stand with 1 horizontal bars (length: 1,2 mt each) for 8 par cans.
- "Auto lock" safety pin.
- Pinto stop inner tube at different levels.
- Air-cushioned system.
- Max height 2,5 mt
- Anti-skid rubber foot-caps.
- Max load: 50 kg.
- Body: black anodized aluminium.

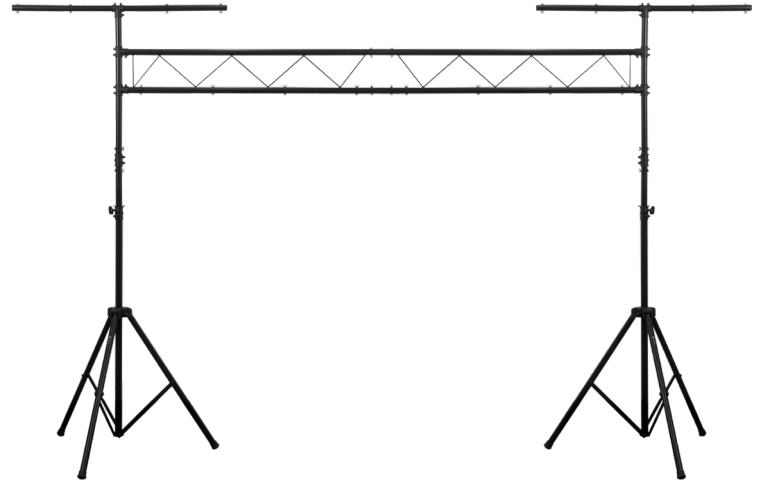

## LS32K

Stand for spot projectors, provided with 2 adjustable aluminium stand.

- 2 horizontal bars (length: 1,2 mt each) for 8 par cans.
- 2 aluminium flat section trusses (L. 3 m).
- Pinto stop inner tube at different levels.
- Max height 3,25 mt
- Anti-skid rubber foot-caps.
- Max load: 80 kg.
- Body: black anodized aluminium.