


## LUMIPIX15IP

LUMIPIX15IP is a tour-ready LED pixel batten conceived to be fully versatile and perform outdoor, delivering advanced brightness and colour mixing by offering individual pixel control of each cell. The robust die-cast aluminium structure with omega quick lock socket on the bracket and the waterproof power and signal connector make LUMIPIX15IP suitable for the most demanding environments.

- Source: 15x10W RGBW LEDs
- Luminous flux: 3587lm
- Beam angle: 16°
- Colour mixing: RGBW/FC
- Colour wheel: virtual colour wheel with presets
- Pixel patterns: pre-programmed dynamic and static patterns
- Protocols: DMX512
- DMX channels: 4/6/10/60/65channel
- Pixel control: pixel2pixel control
- W-DMX: included, wireless solution receiver
- Power consumption (at 230V): 161W
- Output (at 230V): 23 units on a single power line
- Signal connection: Seetronic XLR 5p IN/OUT connectors
- Power connection: Seetronic powerKon waterproof IN/OUT connectors
- IP rating: 65 for outdoor events
- Dimensions (WxHxD): 996x205x160mm
- Weight: 8.6kg

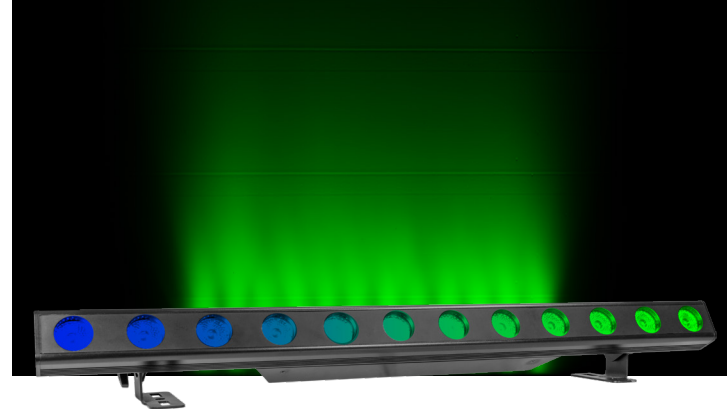

## LUMIPIX12QTOUT

LUMIPIX12QTOUT is a 100 cm linear LED batten designed for professional use granting unprecedented chromatic performance. The super-slim design combined with its extreme colour precision and light output make LUMIPIX12QTOUT a highly flexible and versatile solution for any kind of application or venue such as architectural, cyclorama, wall-washer, pixel effect or blinder.

- Source: 12x10W RGBW LEDs
- Luminous flux: (Without filter) 3587lm - (With filter) 3201lm
- Beam angle: 25°
- Colour mixing: RGBW/FC
- Colour wheel: virtual colour wheel with presets
- Pixel patterns: pre-programmed dynamic and static patterns
- Protocols: DMX512
- DMX channels: 5/7/9/49channel
- Pixel control: pixel2pixel control
- Power consumption (at 230V): 94.8W
- Output (at 230V): 27 units on a single power line
- Signal connection: Amphenol XLR 5p IN/OUT connectors
- Power connection: Seetronic powerKon IN/OUT connectors
- IP rating: 30
- Dimensions (WxHxD): 994x127x137mm
- Weight: 5.4kg



WIFIUSB (optional) LUMIPARIRCH (optional)

## LUMIPIX12UQPRO

LUMIPIX12UQPRO is a 1 m long linear colour changer equipped with 12 high-efficiency RGBW/full colour LED (8W each). The control system is customisable allowing section control and advanced possibilities in effect generation such as LED video or sound activated arrays.

- Source: 12x8W RGBW LEDs
- Luminous flux: 2241lm
- Beam angle: 19°
- Colour mixing: RGBW/FC
- Colour wheel: virtual colour wheel with presets
- Sound mode: music activation through internal microphone and sensitivity control
- Protocols: DMX512
- DMX channels: 4/7/9/12/17channel
- Pixel control: 1/3 section control
- IR: infrared sensor controlled by remote
- Power consumption (at 230V): 73.6W
- Output (at 230V): 18 units on a single power line
- Data: USB port for USB WIFI transmitter (optional)
- Signal connection: XLR 3p+5p IN/OUT connectors
- Power connection: Seetronic powerKon IN/OUT connectors
- IP rating: 20
- Dimensions (WxHxD): 1000x56x168mm
- Weight: 3.3kg



WIFIUSB (optional) LUMIPARIRCH (optional)

## LUMIPIX9UHEPRO

LUMIPIX9UHEPRO is a 1m linear LED batten using an innovative optic system combined with a new light source which performs a 6 primary colour mixing - RGBWA. The light source is composed of 9x12W high-efficiency RGBWAP full-colour LED, offering a more advanced chromatic synthesis than projectors of the previous generation with full control of saturation and colour temperature across the whole spectrum. LUMIPIX9UHEPRO offers a 3 section control of the LED plate to generate a wide range of dynamic effects and light-yokes.

- Source: 9x12W RGBWAP LEDs
- Luminous flux: (15°) 2068lm
- Beam angle: 23°
- Colour mixing: RGBWAP/FC
- Colour wheel: virtual colour wheel with presets
- Sound mode: music activation through internal microphone and sensitivity control
- Protocols: DMX512
- DMX channels: 6/9/11/18/23channel
- Pixel control: 1/3 section control
- IR: infrared sensor controlled by remote
- Power consumption (at 230V): 78.5W
- Output (at 230V): 15 units on a single power line
- Data: USB port for USB WIFI transmitter (optional)
- Signal connection: XLR 3p+5p IN/OUT connectors
- Power connection: Seetronic powerKon IN/OUT connectors
- IP rating: 30
- Dimensions (WxHxD): 1000x55x168mm
- Weight: 3.23kg

