

SMARTBOOK

96 X 3W high power and portable outdoor wireless battery wash light

SMARTBOOK is a wireless battery wash light, performing high output in a super-slim foldable housing. SMARTBOOK, being IP rated, is an ideal tool for outdoor events to light up landscapes and buildings, all with a magnetic optical system (+50° included) to focus the light. SMARTBOOK comes with a quick magnetic recharge flight case and control through wireless DMX.

FEATURES

- 96x3W RGBW/FC LED and with included +50° magnetic filter
- IP rated for outdoor events and with tiltable head
- Wireless DMX built-in receiver

TECHNICAL SPECIFICATIONS

LIGHT SOURCE

- Source: 96x3W RGBW LEDs
- Luminous flux: (without filter) 3019.9 lm - (with 50° filter) 2117 lm - (with 60x10° filter) 2261lm
- Lux: (without filter) 1593 lux - (with 50° filter) 404 lux - (with 60x10° filter) 608lux @3m full

OPTICS

- Beam angle: (without filter) 24° ; (with 50° filter) 35° ; (with 60x10° filter) 40x24°
- Additional optics: Magnetic 60x10° asymmetric filter (optional)
- Other: Magnetic +50° filter (included)

COLOUR SYSTEM

- Colour mixing: RGBW
- Colour wheel: virtual colour wheel with presets

BODY

- Tilt angle: 0-90°

CONTROL

- Protocols: W-DMX
- DMX channels: 4 / 6 / 10channel
- W-DMX: included, wireless solution receiver
- IR: infrared sensor controlled by remote

ELECTRONICS

- Dimmer: linear 0~100% electronic dimmer
- Dimmer curves: 4 different dimming curves available
- Strobe / shutter: 0-30 Hz, electronic

ELECTRICAL


- Power consumption (at 230V): 424W

BATTERY

- Battery: 26 Ah - 18,5V
- Estimated battery life in colour change mode up to: 12h
- Estimated battery life in single colour mode up to: 12h
- Estimated battery life in full-mode up to: 9h
- Re-charge connection: magnetic fast-charge in case
- Re-charge time: 7h/max

PHYSICAL

- Data connection: W-DMX OEM TRX
- Power connection: Seetronic powerKon waterproof IN/OUT connectors
- IP rating: 65 for outdoor installations
- Dimensions (WxHxD): 407x213x100.6mm
- Weight: 8.4kg

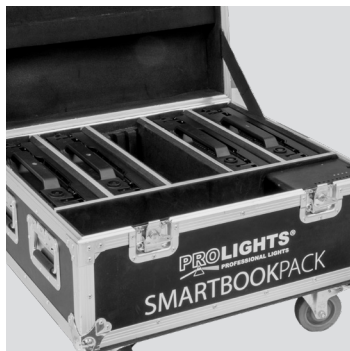

LIGHT SOURCE

96x3W RGBW LEDs



BEAM ANGLE

(without filter) 24° (with 50° filter) 35° (with 60x10° filter) 40x24°



CONNECTIVITY

W-DMX



IP RATING

65 for outdoor events